

Comment on “Monte Carlo Algorithms with Absorbing Markov Chains: Fast Local Algorithms for Slow Dynamics”

In [1] the problem of non-critical slowing of Monte-Carlo simulations is addressed. This phenomenon may occur for instance in low-temperature simulations of the Metropolis or Glauber dynamics if the system gets stuck in a local minimum of the energy. To get around this problem, a different algorithm for simulation of the same dynamics has been presented in [2]. This algorithm, commonly called the n -fold way, directly simulates the times the system is at rest. It is most efficient if the attraction basin of the energy's local minima are small, that is, if the probability to leave a basin after one step and afterwards to stay outside for a long period of time is high.

It may however happen that the attraction basins are of moderate size, for example if some energetically degenerate configurations are in the same basin. Thus it is reasonable to construct a generalisation of the n -fold-way algorithm, which simulates the sojourn times in the basins and the exiting configurations without altering the given dynamics.

One such algorithm is proposed in [1]. This algorithm, however, contains one element which changes the dynamics drastically and – even worse – it does not produce the correct stationary distribution. Let us illustrate this by the following simple example. Consider a random walk ξ in $\{0, 1, 2, \dots, 100\}$ with reflecting boundaries at 0 and 100 and probability $\frac{1}{2}$ to move left or right at each time step inside. The stationary distribution of ξ is $\mathbb{P}(\xi = n) = \frac{1}{100}$ for $1 \leq n \leq 99$ and $\mathbb{P}(\xi = n) = \frac{1}{200}$ for $n = 0, 100$. To every state n we associate a basin $\mathfrak{B}_n := \{n\}$ if $n \leq 40$ or $n \geq 60$ and $\mathfrak{B}_n := \{n, n+1\}$ if $40 < n < 60$. For this setting we have performed a simulation according to the recipe given in [1]. The algorithm produces a single limiting distribution depicted in Fig. 1, which is clearly distinct from the correct one. It effectively introduces a spurious drift depending on the basins chosen. This will also change dynamical properties.

We finally give the relevant probabilities from which a correct algorithm may readily be constructed in the spirit of [1]. Consider a Markov chain Σ in the configuration space with given one time step transition probability $\mathbb{P}(\Sigma(t+1) = \sigma' | \Sigma(t) = \sigma) = p_1(\sigma' | \sigma)$. To every configuration σ associate a set $\mathfrak{B}_\sigma = \{\tilde{\sigma}_1, \dots, \tilde{\sigma}_{b_\sigma}\}$ of $b_\sigma \geq 1$ basin configurations containing at least $\sigma =: \tilde{\sigma}_1$ itself. With the help of the $b_\sigma \times b_\sigma$ -matrix $B_\sigma := (p_1(\tilde{\sigma}_k | \tilde{\sigma}_l))_{k,l=1,\dots,b_\sigma}$ the conditional distribution of the first exit time

$$T_t := \min\{t + \tau : \Sigma(t + \tau) \notin \mathfrak{B}_{\Sigma(t)}; \tau \geq 1\} \quad (1)$$

from the basin can be written as

$$\mathbb{P}(T_t = t + \tau | \Sigma(t) = \sigma) = \beta^\dagger (1 - B_\sigma) B_\sigma^{\tau-1} \delta, \quad (2)$$

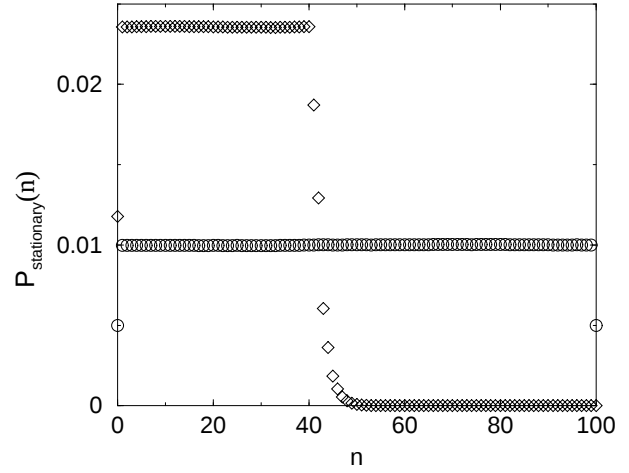


FIG. 1: Distribution of the random walk described in the text using Eq. (3) ($\circ$) or Eq. (4) ($\diamond$) averaged over 10^7 time steps starting from a uniform initial distribution.

where we have used the b_σ -vectors $\beta^\dagger := (1, 1, \dots, 1)$, $\delta^\dagger := (1, 0, 0, \dots, 0)$ and the dagger denotes transposition. The distribution of the exit times is in accordance with that stated in [1]. Now form the set $\mathfrak{E}_\sigma := \{\hat{\sigma}_1, \dots, \hat{\sigma}_{e_\sigma}\}$ of all e_σ exit configurations outside $\mathfrak{B}_\sigma$ that can be reached from $\mathfrak{B}_\sigma$ in one time step. The conditional probability to be in one of these configurations at given first exit time is

$$\begin{aligned} \mathbb{P}(\Sigma(T_t) = \hat{\sigma}_n | T_t = t + \tau; \Sigma(t) = \sigma) \\ = \frac{\varepsilon_n^\dagger E_\sigma B_\sigma^{\tau-1} \delta}{\beta^\dagger (1 - B_\sigma) B_\sigma^{\tau-1} \delta}, \end{aligned} \quad (3)$$

where we have introduced the $e_\sigma \times b_\sigma$ -matrix $E_\sigma := (p_1(\hat{\sigma}_n | \tilde{\sigma}_k))_{n=1,\dots,e_\sigma; k=1,\dots,b_\sigma}$ and the e_σ -vector $(\varepsilon_n)_m := 0$ for $m \neq n$, $(\varepsilon_n)_n := 1$. The algorithm proposed in [1] would correspond to substitute the right-hand side of (3) by

$$\frac{\sum_{\tau'=0}^{\tau-1} \varepsilon_n^\dagger E_\sigma B_\sigma^{\tau'} \delta}{\sum_{\tau'=0}^{\tau-1} \beta^\dagger (1 - B_\sigma) B_\sigma^{\tau'} \delta}. \quad (4)$$

K. Broderix and R. Kree

Georg-August-Universität Göttingen
Institut für Theoretische Physik
Bunsenstr. 9, D-37073 Göttingen
Germany

Email: broderix@theorie.physik.uni-goettingen.de

Version of June 28, 1995

PACS numbers: 02.70.Lq, 05.40.+j, 02.50.Ng

- [1] M.A. Novotny, Phys. Rev. Lett. **74**, 1 (1995)
- [2] A.B. Bortz, M.H. Kalos, and J.L. Lebowitz, J. Comput. Phys. **17**, 10 (1975)